

Specifications

		GS-2032	GS-2632	GS-3232
	Working height*	7.90 m	9.80 m	11.50 m
A	Platform height maximum w/load sense	5.90 m	7.80 m	9.50 m
B	Platform height stowed	1.03 m	1.16 m	1.29 m
C	Platform length - outside	2.26 m	2.26 m	2.26 m
	Platform length - extended	3.18 m	3.18 m	3.18 m
	Slide-out platform extension deck	91 cm	91 cm	91 cm
D	Platform width - outside	81 cm	81 cm	81 cm
	Guardrail height	1.10 m	1.10 m	1.10 m
	Toeboard height	15 cm	15 cm	15 cm
E	Height - stowed: folding guardrails	2.13 m	2.26 m	2.39 m
	Height - stowed: rails folded	1.78 m	1.91 m	2.03 m
F	Length - stowed	2.44 m	2.44 m	2.44 m
	Length - extended	3.33 m	3.33 m	3.33 m
G	Width	81 cm	81 cm	81 cm
H	Wheelbase	1.85 m	1.85 m	1.85 m
I	Ground clearance - center	9 cm	9 cm	9 cm
J	- with pothole guards deployed	2 cm	2 cm	2 cm


Productivity				
	Lift capacity	363 kg	227 kg	227 kg
	Maximum platform occupancy (in/out) ¹	2/1	2/-	2/-
	Drive height	full height	full height	6.71 m
	Drive speed - stowed	3.5 km/h	3.5 km/h	3.5 km/h
	Drive speed - raised	0.8 km/h	0.8 km/h	0.8 km/h
	Gradeability - stowed**	30%	25%	25%
	Max outrigger levelling: front to back	-	-	3°
	Max outrigger levelling: side to side	-	-	5°
	Turning radius - inside	zero	zero	zero
	Turning radius - outside	2.13 m	2.13 m	2.13 m
	Raise / lower speed	30 / 34 sec	30 / 40 sec	57 / 40 sec
	Controls	proportional		
	Drive	dual front wheel		
	Multiple disc brakes	dual rear wheel		
	Tyres - solid non-marking	38 x 13 x 28 cm	38 x 13 x 28 cm	38 x 13 x 28 cm

Power				
	Power source	24 V DC (four 6V 225 Ah batteries)		
	Hydraulic system capacity	17 L	17 L	21 L

Sound & Vibration Levels				
	Sound pressure level (ground workstation)	<70 dBA	<70 dBA	<70 dBA
	Sound pressure level (platform workstation)	<70 dBA	<70 dBA	<70 dBA
	Vibration	<2.5 m/s ²	<2.5 m/s ²	<2.5 m/s ²

Weight***				
		1 825 kg	1 956 kg	2 352 kg

Standards Compliance	EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2001+A2:2009); 2004/108/EC (EMC); 2006/95/EC (LVD)
----------------------	---

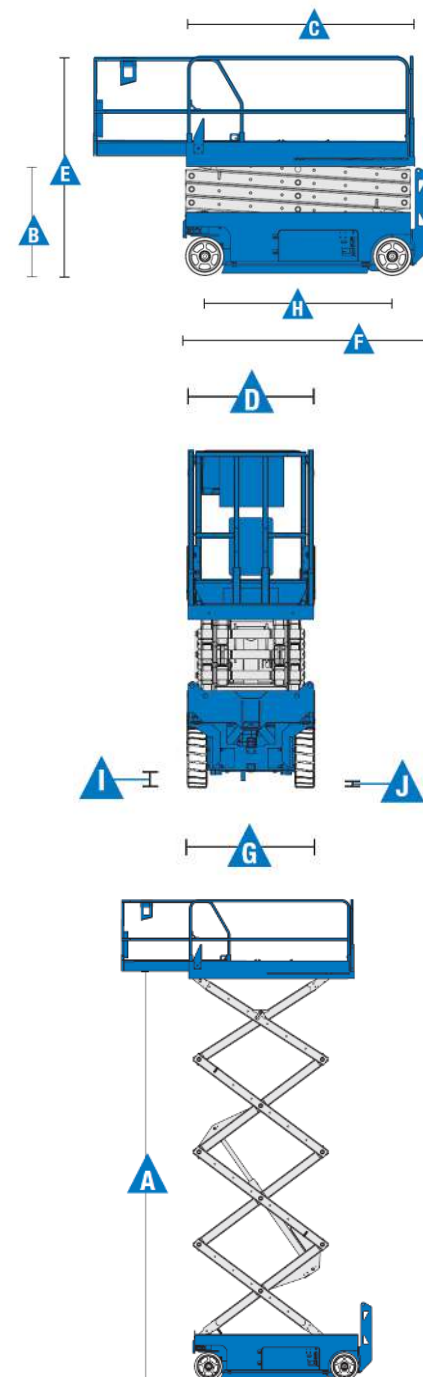

1 Indoor use only for the GS-2632 and GS-3232

* The metric equivalent of working height adds 2 m to platform height

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings

*** Weight will vary depending on options and/or country standards.

Specification 10.08.2015

www.gizo.pl

Centrala:
16-070 Choroszcz k. B-stoku
trasa nr 8 Warszawa - Białystok
Złotonia 225
tel./fax: 85 719 34 40
biuro@gizo.pl

Tycho:
43-100 Tycho, ul. Beskidzka 21
trasa nr 1 Katowice - Tycho
tel./fax: 32 329 86 25-26
fax: 32 329 82 36
tychy@gizo.pl

Warszawa:
03-236 Warszawa
ul. Annopol 4
tel./fax: 22 609 62 25-26
warszawa@gizo.pl

Gdańsk:
80-299 Gdańsk
(obwodnica Trójmiasta)
ul. Międzygwieżna 7
tel./fax: 58 341 86 98
gdansk@gizo.pl

Poznań:
61-080 Tarnowo Podgórne
ul. Poznańska 48, Swadzim
tel./fax: 61 843 38 44
poznan@gizo.pl

Bełchatów:
97-427 Rogowiec
ul. Instalacyjna 14
tel.: 604 414 235
belchatow@gizo.pl

Szczecin:
72-001 Kolbaskowo 119
tel.: 602 795 195
szczecin@gizo.pl

Lublin:
tel. 602 374 205
lublin@gizo.pl

Wrocław:
52-014 Wrocław
ul. Opolska 140
tel.: 602 425 600
wroclaw@gizo.pl

Europa Zachodnia:
tel.: +48 602 188 588
europa@gizo.pl

Europa Wschodnia:
tel.: +375 293 211 999
sasha@gizo.pl

SPRZEDAŻ • WYNAJEM • SERWIS • CZĘŚCI



Features

Standard Features

GS-2032

- 7.90 m – working height
- 363 kg – lift capacity

GS-2632

- 9.80 m – working height
- 227 kg – lift capacity

GS-3232

- 11.50 m – working height
- 227 kg – lift capacity

Productivity

- 0.91 m extension deck
- 2.26 x 0.81 m steel platform
- Automatic levelling outriggers (on GS-3232 only, standard)
- Folding rails with half-height swing gate
- Smart Link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- Platform control with battery charge indicator
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual brake release
- Swing-out component trays
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter
- Certified load sensor

Power

- 24 V DC battery pack
- Universal 20 amp smart charger

Drive

- Dual front wheel drive

Tyres

- Solid non-marking

(1) Includes a first 2 years subscription

(2) Available on selected models only. See your Genie representative for further information

(3) For outdoor models only - not necessary for indoor models.

Options & Accessories

- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Biodegradable hydraulic oil(2)
- Dual flashing beacons
- Track & Trace(1) (GPS unit providing machine location & operating information)
- Motion alarm package
- Automotive horn
- Low temperature cut-out module(3)
- Maintenance-free batteries



SPRZEDAŻ • WYNAJEM • SERWIS • CZĘŚCI



www.gizo.pl

Centrala:
16-070 Choroszcz k. B-stoku
trasa nr 8 Warszawa - Białystok
Złotonia 225
tel./fax: 85 719 34 40
biuro@gizo.pl

Tychy:
43-100 Tychy, ul. Beskidzka 21
trasa nr 1 Katowice - Tychy
tel.: 32 329 86 25-26
fax: 32 329 82 36
tychy@gizo.pl

Warszawa:
03-236 Warszawa
ul. Annapol 4
tel./fax: 22 609 62 25-26
warszawa@gizo.pl

Gdańsk:
80-299 Gdańsk
(obwodnica Trójmiasta)
ul. Międzygwieżna 7
tel./fax: 58 341 86 98
gdansk@gizo.pl

Poznań:
61-080 Tarnowo Podgórne
ul. Poznańska 48, Swadzim
tel./fax: 61 843 38 44
poznan@gizo.pl

Bełchatów:
97-427 Rogowiec
ul. Instalacyjna 14
tel.: 604 414 235
belchatow@gizo.pl

Szczecin:
72-001 Kolbaskowo 119
tel.: 602 795 195
szczecin@gizo.pl

Lublin:
tel. 602 374 205
lublin@gizo.pl

Wrocław:
52-014 Wrocław
ul. Opolska 140
tel.: 602 425 600
wroclaw@gizo.pl

Europa Zachodnia:
tel.: +48 602 188 588
europa@gizo.pl

Europa Wschodnia:
tel.: +375 293 211 999
sasha@gizo.pl