

Specification

		GS-1532	GS-1932
	Working height maximum*	6.40 m	7.60 m
A	Platform height maximum w/load sense	4.40 m	5.60 m
B	Platform height stowed	0.97 m	1.00 m
C	Platform length - outside	1.63 m	1.63 m
	Platform length - extended	2.54 m	2.54 m
	Slide-out platform extension deck	0.91 m	0.91 m
D	Platform width - outside	0.74 m	0.74 m
E	Height - stowed: folding guardrails	2.03 m	2.11 m
	Height - stowed: rails folded	1.73 m	1.75 m
F	Length - stowed	1.83 m	1.83 m
	Length - stowed extended	2.74 m	2.74 m
G	Width	0.813 m	0.813 m
H	Wheelbase	1.32 m	1.32 m
I	Ground clearance - center	6 cm	6 cm
J	- with pothole guards deployed	2 cm	2 cm

Productivity			
	Lift capacity	272 kg	227 kg
	Maximum platform occupancy (in/out) ¹	2/1	2/1
	Drive speed - stowed	4.0 km/h	4.0 km/h
	Drive speed - raised	0.8 km/h	0.8 km/h
	Gradeability - stowed**	30%	25%
	Turning radius - inside	zero	zero
	Turning radius - outside	1.55 m	1.55 m
	Raise / lower speed	16 / 29 sec	16 / 29 sec
	Controls	proportional	
	Drive	dual front wheel	
	Multiple disc brakes	dual rear wheel	
	Tyres - solid non-marking	30x11x20 cm	30x11x20 cm

Power		
	Power source	24 V DC (4 x 6V 225 Ah)
	Hydraulic system capacity	14.2 L

Sound & Vibration Levels		
	Sound pressure level (ground workstation)	<70 dBA
	Sound pressure level (platform workstation)	<70 dBA
	Vibration	<2.5 m/s ²




Weight***		
		1 269 kg
		1 503 kg

Standards Compliance	EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2001+A2:2009); 2004/108/EC (EMC); 2006/95/EC (LVD)
----------------------	---

* The metric equivalent of working height adds 2 m to platform height

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings

*** Weight will vary depending on options and/or country standards.

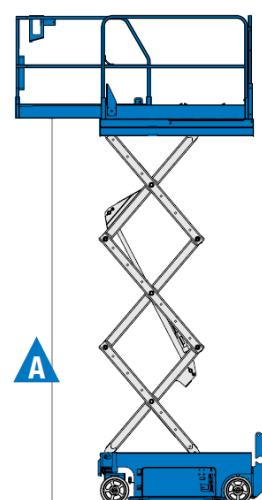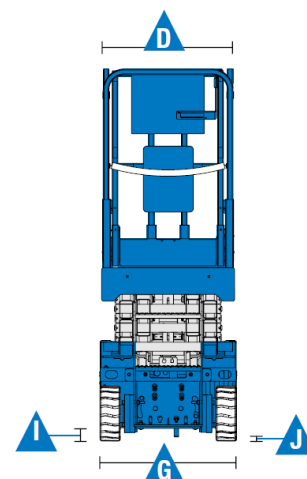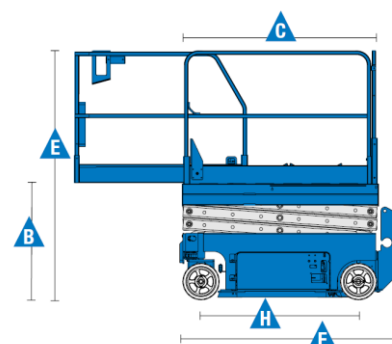

Specification 25.02.2016

www.gizo.pl

Oddział Białystok
Złotoryja 225
16-070 Choroszcz
tel.: +48 85 719 34 30, 40, 60
e-mail: biuro@gizo.pl

Oddział Belchatów
Strefa Przemysłowa Bogumitów
ul. Karłowa 9, 97-410 Kleszczów
tel.: 44 731 46 56
fax: 44 731 46 57
e-mail: belchatow@gizo.pl

Oddział Gdańsk
ul. Międzygwieźna 7
80-299 Gdańsk
tel./fax: +48 58 341 86 98
e-mail: gdansk@gizo.pl

Oddział Lublin
tel.: +48 601 855 388
e-mail: lublin@gizo.pl

Oddział Poznań
ul. Poznańska 48, Śwadowim
62-080 Tarnowo Podgórne
tel./fax: +48 61 843 38 44
e-mail: poznan@gizo.pl

Oddział Szczecin
ul. Lubieszyska
72-006 Szczecin - Mierzyn
tel.: +48 91 469 43 37
tel.: +48 602 795 195
e-mail: szczecin@gizo.pl

Oddział Tychy
ul. Beskidzka 21
43-100 Tychy
tel.: +48 32 329 86 25
fax: +48 32 329 82 36
e-mail: tychy@gizo.pl

Oddział Warszawa
ul. Annapol 4
03-236 Warszawa
tel./fax: +48 22 609 62 25
e-mail: warszawa@gizo.pl
Oddział EU
tel.: +48 602 188 588
e-mail: europa@gizo.pl

Oddział Wrocław
ul. Zachodnia 2
55-011 Siechnice
tel.: +48 71 396 37 96
e-mail: wroclaw@gizo.pl
Oddział BY
tel.: +375 293 211 999
e-mail: sasha@gizo.pl

Features

Standard Features

GS - 1532

- 6.40 m – working height
- 272 kg – lift capacity

GS-1932

- 7.60 m – working height
- 227 kg – lift capacity

Wyposażenie

- 0.91 m slide-out extension deck
- 1.63 x 0.74 m steel platform
- bolted rails with half-height swing gate
- smart link™ control system (joystick, 2 lift speeds & 2 selectable proportional drive speeds, user-friendly diagnostics)
- rear recessed charger receptacle
- platform control with battery charge indicator
- on-board diagnostic system
- ac power to platform
- lanyard attachment points
- manual platform lowering valve
- emergency stop at both platform and ground controls
- rear wheel multiple disc brakes
- front wheel hydraulic dynamic braking
- manual brake release
- swing-out component trays
- pothole guards
- tilt level sensor with audible alarm
- descent alarm
- flashing beacons
- electronic horn
- hour meter
- certified load sensor
- telematics-ready connector

Power

- 24 v dc battery pack
- universal 20 amp smart charger

Drive

- dual front wheel drive

Tyres

- solid non-marking

Options & Accessories

- air line to platform
- power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- biodegradable hydraulic oil
- motion alarm package
- maintenance-free batteries



www.gizo.pl

Oddział Białystok
Złotaria 225
16-070 Chorześć
tel.: +48 85 719 34 30, 40, 60
e-mail: biuro@gizo.pl

Oddział Belchatów
Strefa Przemysłowa Bogumińów
ul. Karłowa 9, 97-410 Kleszczów
tel.: 44 731 46 56
fax: 44 731 46 57
e-mail: belchatow@gizo.pl

Oddział Gdańsk
ul. Międzygwieźna 7
80-299 Gdańsk
tel./fax: +48 58 341 86 98
e-mail: gdansk@gizo.pl

Oddział Lublin
tel.: +48 601 855 388
e-mail: lublin@gizo.pl

Oddział Poznań
ul. Poznańska 48, Swadzim
62-080 Tarnowo Podgórne
tel./fax: +48 61 843 38 44
e-mail: poznan@gizo.pl

Oddział Szczecin
ul. Lubieszńska
72-006 Szczecin – Mierzyn
tel.: +48 91 469 43 37
tel.: +48 602 795 195
e-mail: szczecin@gizo.pl

Oddział Tychy
ul. Beskidzka 21
43-100 Tychy
tel.: +48 32 329 86 25
fax: +48 32 329 82 36
e-mail: tychy@gizo.pl

Oddział Warszawa
ul. Annopol 4
03-236 Warszawa
tel./fax: +48 22 609 62 25
e-mail: warszawa@gizo.pl

Oddział EU
tel.: +48 602 188 588
e-mail: europa@gizo.pl

Oddział Wrocław
ul. Zachodnia 2
55-011 Siechnice
tel.: +48 71 396 37 96
e-mail: wroclaw@gizo.pl

Oddział BY
tel.: +375 293 211 999
e-mail: sasha@gizo.pl