






Specifications

		GN-1530 GTJZ0408S	GN-1532 GTJZ0408M
	Working height*	6,6 m	6,6 m
A	Platform height	4,6 m	4,6 m
C D	Platform dimension (length x width)		
	- with the tray up	1,78 m x 76 cm	1,78 m x 76 cm
	- with the tray down	2,68 m x 76 cm	2,68 m x 76 cm
E	Height - stowed	2,1 m	2,1 m
F	Length - stowed	1,78 m	1,78 m
G	Width	76 cm	81 cm
I / J	Ground clearance	7 cm	7 cm
Productivity			
	Max platform occupancy (indoor / outdoor)	2/-	2/1
	Lift capacity	280 kg	280 kg
	Drive speed - stowed	4,0 km/h	3,2 km/h
	Drive speed - raised	0,8 km/h	0,8 km/h
	Gradeability**	30%	30%
	Turning radius - inside	4 cm	27 cm
	Turning radius - outside	1,49 m	1,63 m
	Raised / lower speed	16/29 sec	16/29 sec
	Controls	proportional	proportional
	Tyres – solid non-marking	30,5 cm x 11,5 cm	30,5 cm x 11,5 cm
Power			
	Power source	24V DC (4 maintenance – free batteries) 6V 225 Ah	24V DC (4 maintenance – free batteries) 6V 225 Ah
	Hydraulic system capacity	18 L	18 L
Sound and Vibration levels			
	Sound pressure level - ground	<70 dBA	<70 dBA
	Sound Pressure level - platform	<70 dBA	<70 dBA
	Vibration	<2,5 m/s ²	<2,5 m/s ²
Weight***			
		1,248 kg	1,261 kg
CE – Standard Compliance		EC Directives: 2006/42/EC – machinery EN280:2013); Directives 2004/108/EC (EMC); Directives 2006/95/EC (LVD)	

* the metric equivalent of working height adds 2m to platform height.

** gradeability applies on driving on slopes. See operator's manual for details regarding slope ratings

*** weight will vary depending on options and/or country standards

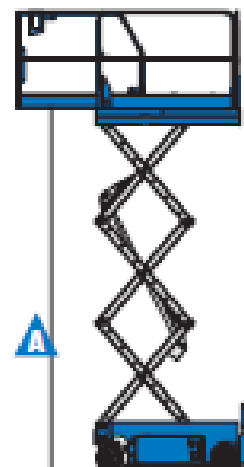



Features

Standard Features

GN-1530 (GTJZ0408S)

- 6,6 m – Working height
- 280 kg – Lift capacity

GN-15432 (GTJZ0408M)

- 6,6 m – Working height
- 280 kg – Lift capacity

Equipment

- Electrostatic powder coating system
- Unical platform stability, construction is much more solid, platform extension smoothly operated
- Solid floor made of anti-slippery, riffled metal sheets
- Durable steel protection railings with openable gate
- Easily removable riffled-surface steps
- Option of connecting working light (connection line and attachment points for spotlight)
- Handles for crane lifting
- Drive motors protection, hydraulic hoses protection
- Machine prepared for either side or back forklift loading
- Side protection pads on the chassis and components swing-out trays
- Stable and solid swing-out electric and hydraulic components trays – key lockers
- Onboard electronic system DELTA 5, USA, possible calibration without PC
- Platform control joystick with battery charge indicator
- Fully proportional joystick for left or right handed users
- Emergency stop at both platform and ground controls
- Battery charging access point on the side of the machine
- 230 V electric line to platform with circuit breaker protection
- Manual platform lowering valve
- Front wheel hydraulic dynamic braking
- Manual hydraulic brake release
- Electronic horn
- Tilt level sensor with audible alarm
- Hour meter
- Certified load sensor
- Flashing LED beacons

Standard Features

Power

- 24 V DC – four 6V maintenance free batteries - 225 Ah
- Universal 20 AMP smart charger

Drive

- Hydraulic ,dual front wheel drive

Tyres

- Solid, non-marking

Additional Options

- Airline to platform
- Biodegradable hydraulic oil
- Maintenance free lithium battery, Gell battery or AGM battery option
- Individual painting colors selection on demand
- Parktronic System (parking sensors set).
- Option of 2 working lights mounted at the end of platform (LED spotlight)

