




## Specifications

		GN-4647 GTJZ1412
	Working height*	15,80 m
A	Platform height	13,80 m
C D	Platform dimension (length x width)	
	- with the tray up	2,64 m x 81 cm
	- with the tray down	3,54 m x 81 cm
E	Height - stowed	2,20 m
F	Length - stowed	2,76 m
G	Width	1,25 m
I / J	Ground clearance	10 cm
Productivity		
	Max platform occupancy (indoor / outdoor)	2/1
	Lift capacity	227 kg
	Drive speed - stowed	3,2 km/h
	Drive speed - raised	0,8 km/h
	Gradeability**	25%
	Turning radius - inside	zero
	Turning radius - outside	2,56 m
	Raised / lower speed	75/55 sec
	Controls	proportional
	Tyres – solid non-marking	38 cm x 12,5 cm
Power		
	Power source	24V DC (4 maintenance – free batteries) 6V 300 Ah
	Hydraulic system capacity	25 L
Sound and Vibration levels		
	Sound pressure level - ground	<70 dBA
	Sound Pressure level - platform	<70 dBA
	Vibration	<2,5 m/s <sup>2</sup>
Weight***		
		3,360 kg
CE – Standard Compliance		EC Directives: 2006/42/EC – machinery EN280:2013); Directives 2004/108/EC (EMC); Directives 2006/95/EC (LVD)

\* the metric equivalent of orking height adds 2m to platform height.

\*\* gradeability applies on driving on slopes. See operator's manual for details regarding slope ratings

\*\*\* weight will vary depending on options and/or country standards

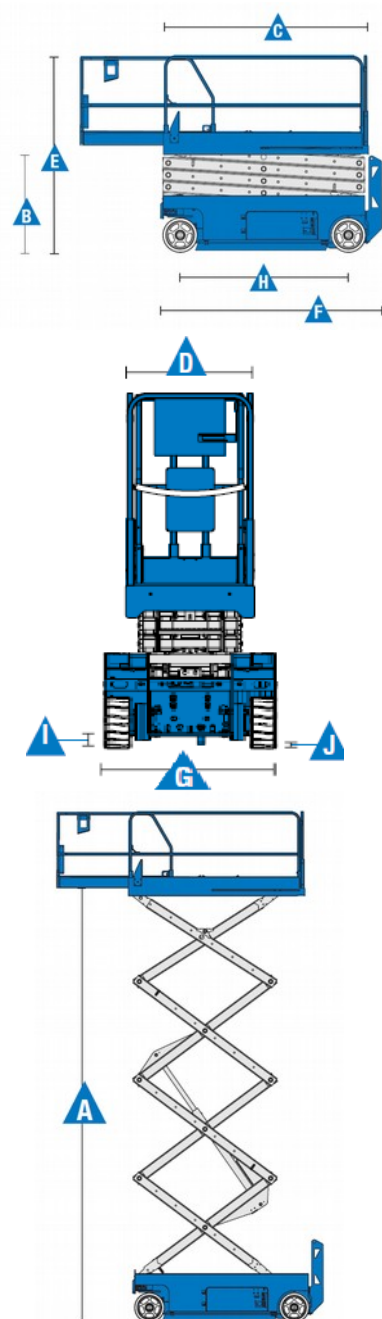



## Features

### Standard Features

#### GN-4647 (GTJZ1412)

- 15,8 m – Working height
- 227 kg – Lift capacity

#### Equipment

- Electrostatic powder coating system
- Unical platform stability, construction is much more solid, platform extension smoothly operated
- Solid floor made of anti-slippery, ruffled metal sheets
- Durable steel protection railings with openable gate
- Easily removable ruffled-surface steps
- Option of connecting working light (connection line and attachment points for spotlight)
- Handles for crane lifting
- Drive motors protection, hydraulic hoses protection
- Machine prepared for either side or back forklift loading
- Side protection pads on the chassis and components swing-out trays
- Stable and solid swing-out electric and hydraulic components trays – key lockers
- Onboard electronic system DELTA 5, USA, possible calibration without PC
- Platform control joystick with battery charge indicator
- Fully proportional joystick for left or right handed users
- Emergency stop at both platform and ground controls
- Battery charging access point on the side of the machine
- 230 V electric line to platform with circuit breaker protection
- Manual platform lowering valve
- Front wheel hydraulic dynamic braking
- Manual hydraulic brake release
- Electronic horn
- Tilt level sensor with audible alarm
- Hour meter
- Certified load sensor
- Flashing LED beacons

### Standard Features

#### Power

- Universal 25 AMP smart charger
- 24V DC (4 maintenance – free batteries) 6V 300 Ah

#### Drive

- Hydraulic ,dual front wheel drive

#### Tyres

- Solid, non-marking

### Additional Options

- Airline to platform
- Biodegradable hydraulic oil
- Maintenance free lithium battery, Gell battery or AGM battery option
- Individual painting colors selection on demand
- Parktronic System (parking sensors set).
- Option of 2 working lights mounted at the end of platform (LED spotlight)

