



ENVIRONMENTALLY FRIENDLY COMPANY



Product catalog



POLAND COMPANY

YEAR OF ESTABLISHMENT 1990



+48 697 300 300

- Are you looking for **rental machines**?
- Do you need to do **work at height**?
- Are you an investor? Do you manage **warehouses, factories**?
- Do you need **a lift**?
- You are the owner of the machine. Are you looking for proven **service**?
- Do you have operators without **authorization to operate machines**?
- Are you looking for **trainings**?

In Gizo **you will find everything.**

IN Gizo:

10 branches in Poland

It is a fast and cheap transport to the project location

We operate in Europe

Branches in the Czech Republic, Slovakia, Germany, Belarus

2500 machines

is a guarantee of the perfect selection of the device for your planned works

Matched offer

long-term rental, purchase or leasing, You decide

Well qualified service

We are there where you need us, repair and inspections of machine at the machine's workplace

Online parts store

Own warehouse in Poland means quick access to parts of many brands that you need

Trainings

Rooms adapted to high requirements mean the comfort and safety of training of your employees

Table of Contents:

Scissor lifts

- Sinoboom - battery, E-Drive **8**
- Genie - battery, E-Drive **10**
- Sinoboom - battery, Hydraulic Drive **12**
- Genie - battery, Hydraulic Drive **14**
- Genie / JLG - battery for indoor and rough terrain **16**
- Genie - Diesel **18**
- Genie - BI-Energy/ hybrid **20**

Articulated boom lifts

- ATN - E-Drive **22**
- JLG - E-Drive **23**
- Manitou - E-Drive **24**
- Genie - E-Drive **26**
- Manitou - Diesel **28**
- Genie - Diesel **30**
- Manitou - BI-Energy/ hybrid **32**
- Genie - On the trailer **34**
- Isoli - On the car **35**

Telescopic boom lifts

- Manitou - Diesel **36**
- Genie - Diesel **38**
- Genie - On tracks **40**
- Aichi - On tracks **41**

Material Lifts- Mini cranes

- Genie - Powered by CO2 or compressed air **42**
- Wienold / Genie - Manual **44**

Passenger lifts

- JLG - Sliding, self-propelled **46**
- JLG - Sliding, self-propelled **48**

Forklifts

- Linde - E-Drive **49**
- Linde / Manitou / Kalmar / Konecranes / JCB - Diesel **51**

Telescopic loaders

- Genie - Compact **52**
- Genie / Manitou - With outriggers **52**
- Genie / Manitou - Roto **53**

Telescopic loaders accessories

- two-segment boom/ hook / Extensions / Hydraulic winch with hook **54**

Mini loaders

- Bobcat **56**

Mini diggers

- Bobcat **56**

Self-propelled cranes

- Valla **57**

Accessories for construction machinery

Forks / Demolition hammer / Pallet forks / Transplanting machine / Snow plow/
Salt and sand spreader / Transport bucket / Digging bucket **58**

Other products

- Ozonator / Diggers / Transport rollers / Aluminum ramps / Containers/ Tractors/ Fuel tanks / Trailers / Pacton semi-trailers/ Electric vehicles Power generators / Transport / Battery regenerator **60**

These lifts you can transport on the Q-Line trailer:



Wienold
SLK WLUP MFC

Page 46



GENIE
SLA SLC GH

Page 44



JLG
ECOLIFT PECOLIFT
GENIE
GRC, GR, AWP, IWP, GRJ
Manitou
100VJR

Page 48



Scissor and passenger lifts
Sinoboom Genie JLG

Page 8

Q-Line trailer





Model	GN 1330SE	GN 1530E	GN 1532E	GN 1930E	GN 1932E	GN 2132E	GN 2146E	GN 2732E	GN 2746E	GN 3346E	GN 4047E	GN 4647E Plus	GN 4655E
Working height	5,8 m	6,6 m	6,6 m	7,8 m	7,8 m	8,3 m	8,3 m	10,1 m	10,1 m	12 m	w. 13.9m z. 11m	w. 15.8m	15,8 m
Platform height	3,8 m	4,6 m	4,6 m	5,8 m	5,8 m	6,3 m	6,3 m	8,1 m	8,1 m	10 m	w. 11.9m z. 9m	w. 13.8m	13,8 m
Slide-out platform extension dec	0,6 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m
Machine length/width/ heigh	1,42 m 0,76 m 1,97 m	1,80 m 0,79 m 2,12 m	1,80 m 0,81 m 2,12 m	1,80 m 0,79 m 2,14 m	1,80 m 0,81 m 2,14 m	2,46 m 0,83 m 2,24 m	2,45 m 1,17 m 2,22 m	2,46 m 0,83 m 2,36 m	2,45 m 1,17 m 2,36 m	2,48 m 1,17 m 2,48 m	2,45 m 1,17 m 2,6 m	2,78 m 1,27 m 2,6 m	2,78 m 1,41 m 2,6 m
Machine heigh with folding rails	1,67 m	1,87 m	1,87 m	1,88 m	1,88 m	1,84 m	1,6 m	1,96 m	1,73 m	1,86 m	1,98 m	1,96 m	1,96 m
Lift capacity	240 kg	280 kg	280 kg	230 kg	230 kg	380 kg	550 kg	250 kg	450 kg	320 kg	320kg	350 kg	227 kg
Maximum platform occupancy indoor/outdoor	2/0	2/0	2/1	2/0	2/1	2/1	2/2	2/0	2/2	2/1	2/1	2/0	2/1
Weight	880 kg	1375 kg	1375 kg	1575 kg	1575 kg	2090 kg	2455 kg	2265 kg	2715 kg	2815 kg	3210 kg	3375 kg	3430 kg
Power	2 Main- tenan- ce-free batteries	Four Maintenance-free batteries											
	AGM 24V DC 12V 115Ah	AGM 24V DC 6V 225Ah			AGM 24V DC 6V 225Ah	AGM 24V DC 6V 225Ah	AGM 24V DC 6V 240Ah	AGM 24V DC 6V 225Ah	AGM 24V DC 6V 240Ah		AGM 145Ah 2x 290Ah		
Drive	Dual front wheel electro engines												
Wheels	Full, grey Non-marking tyres												






Model	GS 1330mE	GS 1530E	GS 1532E	GS 1930E	GS 1932E	GS 2032E	GS 2046E	GS 2632E	GS 2646E	GS 3232E	GS 3246E	GS 4046E	GS 4655E
Working height	W. 5.9m Z. 5,03m	W. 6,61m Z. 6,11m	W. 6,61m Z. 5,87m	W. 7,85m Z. 6,47m	W. 7,85m Z. 6,47m	W. 8,13m Z. 6,88m	W. 8,13m Z. 6,98m	W. 9,96m Z. 7,79m	W. 9,96m Z. 7,99m	W. 11,78m Z. 7,49m	W. 11,78m Z. 8,71m	W. 13,94m Z. 9,01m	W. 15,95m Z. 8,55m
Platform height	W. 3,9m Z. 3,2m	W. 4,61m Z. 4,11m	W. 4,61m Z. 3,87m	W. 5.85m Z. 4,47m	W. 5.85m Z. 4,47m	W. 6,13m Z. 4,88m	W. 6,13m Z. 4,98m	W. 7,96m Z. 5,79m	W. 7,96m Z. 5,99m	W. 9,78m Z. 5,49m	W. 9,78m Z. 6,71m	W. 11,94m Z. 7,01m	W. 13,95m Z. 6,55m
Slide-out platform extension dec	0,46 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	1,22 m
Machine length/width/ heigh	1,41 m 0,78 m 2,02 m	1,83 m 0,76 m 2,12m	1,83 m 0,82 m 2,12m	1,83 m 0,76 m 2,16 m	1,83 m 0,82 m 2,16 m	2,44 m 0,81 m 2,17 m	2,44 m 1,16 m 2,17 m	2,44 m 0,81 m 2,32 m	2,44 m 1,16 m 2,32 m	2,44 m 0,81 m 2,44 m	2,44 m 1,16 m 2,43m	2,48 m 1,16 m 2,57 m	3,11 m 1,41 m 2,77 m
Machine heigh with folding rails	1,68 m	1,72 m	1,72 m	1,80 m	1,80 m	1,80 m	1,58m	1,94 m	1,70 m	2,07 m	1,82 m	1,98 m	1,98 m
Lift capacity	227 kg	272 kg	272 kg	227 kg	227 kg	363 kg	544 kg	227 kg	454 kg	227 kg	318 kg	350 kg	349 kg
Maximum platform occupancy indoor/outdoor	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	2/1	3/1	3/2
Weight	885 kg	1242 kg	1252 kg	1456 kg	1329 kg	1832 kg	1775 kg	2145 kg	1971 kg	2434 kg	2367 kg	3117 kg	3701 kg
Power	two acid batteries	Four acid batteries											
	24V 12V 85Ah	24V DC 6V		24V DC 6V	24V DC 6V		24 V DC 6V 210Ah	24V DC 6V	24V DC 6V 210 Ah	24V DC 6V	24 V DC 6V 210 Ah	24 V DC 12V 210Ah	24V DC 300 Ah 12 V
Drive	Dual front wheel electro engines												
Wheels	Full, grey Non-marking tyres												





Model	GN 1530	GN 1532	GN 1930	GN 1932	GN 2132	GN 2146	GN 2732	GN 2746	GN 3346	GN 4047	GN 4647	GN 4655
Working height	6,6 m	6,6 m	7,8 m	7,8 m	8,3 m	8,3 m	10,1 m	10,1 m	12 m	13,9 m	15,8 m	15,8 m
Platform height	4,6 m	4,6 m	5,8 m	5,8 m	6,3 m	6,3 m	8,1 m	8,1 m	10 m	11,9 m	13,8 m	13,8 m
Slide-out platform extension dec	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m	0,9 m
Machine length/width/ heig	1,78 m 0,76 m 2,1 m	1,78 m 0,81 m 2,1 m	1,78 m 0,76 m 2,12 m	1,78 m 0,81 m 2,12 m	2,39 m 0,81 m 2,22 m	2,39 m 1,15 m 2,22 m	2,39 m 0,81 m 2,35 m	2,45 m 1,17 m 2,36 m	2,39 m 1,15 m 2,48 m	2,39 m 1,15 m 2,60 m	2,76 m 1,25 m 2,6 m	2,78m 1,41 m 2,6 m
Machine heigh with folding rails	1,84 m	1,84 m	1,86 m	1,86 m	1,83 m	1,6 m	1,96 m	1,73 m	1,86 m	1,98 m	2,2 m	1,96 m
Lift capacity	280 kg	280 kg	230 kg	230 kg	380 kg	550 kg	250 kg	450 kg	320 kg	320 kg	227 kg	227 kg
Maximum platform occupancy indoor/outdoor	2/0	2/1	2/0	2/1	2/1	2/2	2/0	2/2	2/1	2/1	2/1	2/1
Weight	1330 kg	1330 kg	1526 kg	1526 kg	1770 kg	2070 kg	1970 kg	2490 kg	2570 kg	2900 kg	3364 kg	3400 kg
Power	Four acid batteries											
	24V DC 6V 225Ah				24V DC 6V	24V DC 6V 240Ah	24V DC 6V 225Ah	24V DC 6V 240Ah		24V DC 12V 300Ah		
Drive	Two hydraulic motors on the front wheels											
Wheels	Full, grey Non-marking tyres											

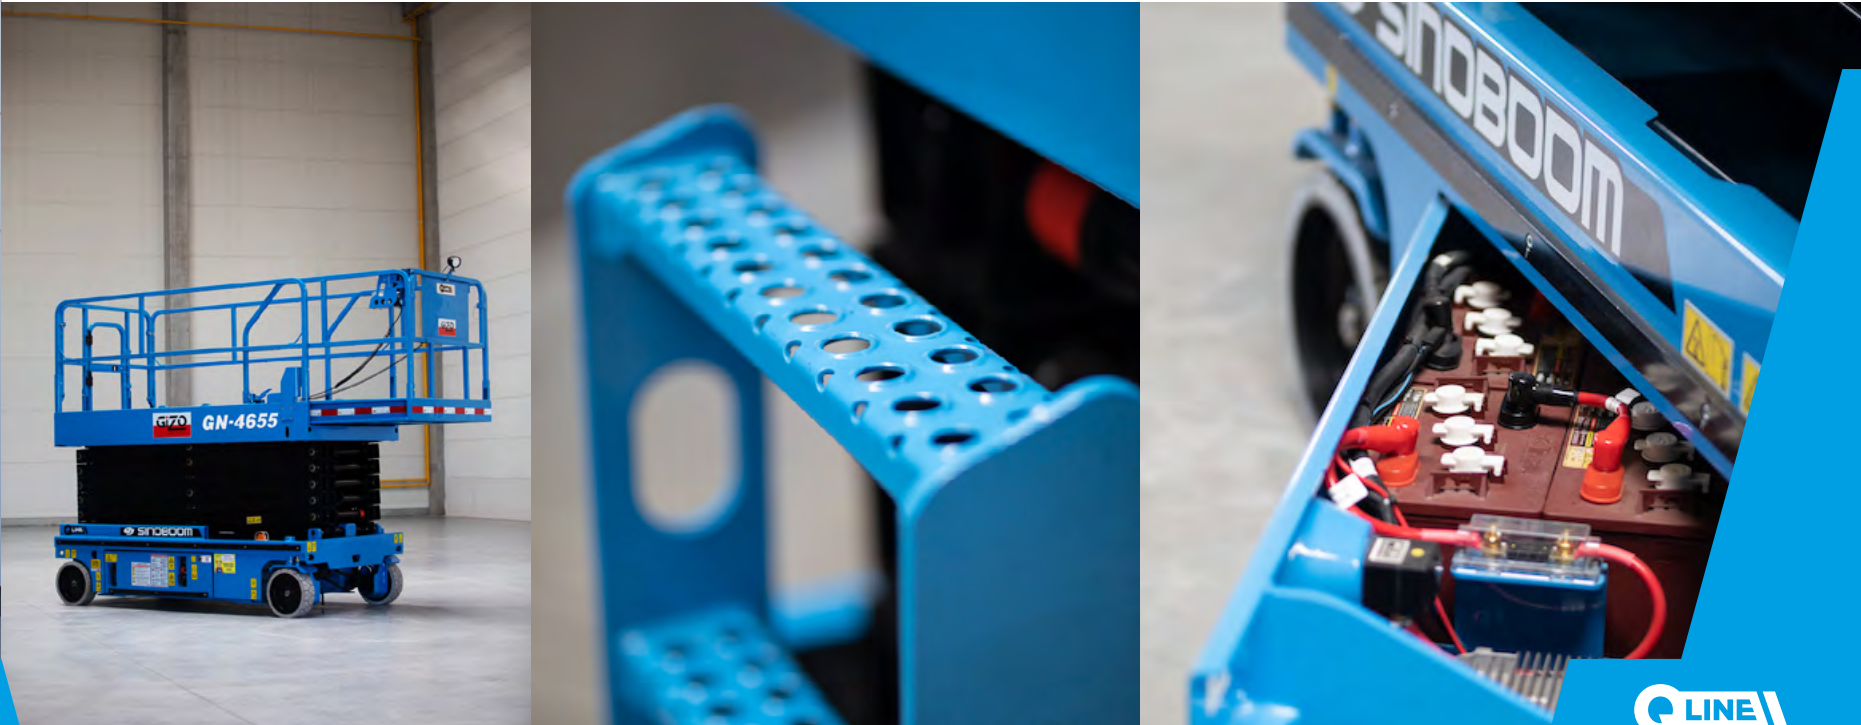



Model	GS 1530	GS 1532	GS 1930	GS 1932	GS 2032	GS 2632	GS 2646	GS 3246	GS 4046
Working height*	W. 6,57m Z. 6,11m	6,57 m	7,79 m	7,79 m	7,9 m	9,93 m	9,80 m	11,75 m	13,70 m
Platform height*	W. 4,61m Z. 4,11m	4,57 m	5,79 m	5,79 m	5,9 m	7,93 m	7,80 m	9,75 m	11,70 m
Wysuwany balkon	0,91m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m	0,91 m
Machine length/width/ heigh	1,83 m 0,76 m 2,08 m	1,83 m 0,81 m 2,03 m	1,83 m 0,76 m 2,11m	1,83 m 0,81 m 2,11 m	2,44 m 0,81 m 2,13 m	2,44 m 0,81 m 2,26 m	2,41 m 1,17 m 2,26 m	2,41 m 1,17 m 2,39 m	2,48 m 1,19 m 2,54 m
Machine heigh with folding rails	1,72 m	1,73 m	1,75 m	1,75 m	1,78 m	1,91 m	1,68 m	1,80 m	1,95 m
Lift capacity	272 kg	272 kg	227 kg	227 kg	363 kg	227 kg	454 kg	318 kg	350 kg
Maximum platform occupancy in-door/outdoor	2/1	2/1	2/-	2/1	2/1	2/-	2/2	2/1	3/-
Weight	1278 kg	1269 kg	1476 kg	1503 kg	2012 kg	1959 kg	2412 kg	2781 kg	3221 kg
Power	Four acid batteries								
	24V DC 6V 225Ah	24V 6V 225Ah		24V DC 6V 225Ah				24V DC 6V 300Ah	
Drive	Dual front wheel electro engines								
Wheels	Full, grey Non-marking tyres								

* data depends on the version of the machine, for the exact specification of the machine, please contact your Gizo representative





Battery for indoor and rough terrain work

Scissor lifts

Battery for indoor and rough terrain work



Model	Genie GS2669 DC ST	Genie GS3268DC	Genie GS3369 DC ST	Genie GS4069 DC ST	JLG 4069	JLG ERT 2669
Working height	9,70 m	11,8 m	11,75 m	14,12 m	14 m	9,75 m
Platform height	7,70 m	9,8 m	9,75 m	12,12 m	12 m	7,98 m
Slide-out platform extension dec	1,52 m	1,52 m	1,52 m	1,52 m	-	-
Machine length/width/ heigh	3,76 m 1,75 m 1,47 m	2,67 m 1,73 m 2,46 m	3,76 m 1,75 m 1,47 m	3,76 m 1,75 m 1,65 m	3,53 m 1,76 m 2,62 m	3,53 m 1,76 m 1,3 m
Machine heigh with folding rails	1,47 m	1,77 m	1,47 m	1,65 m	2,62 m	1,3 m
Lift capacity	680 kg	454 kg	454 kg	363 kg	363 kg	680 kg
Maximum platform occupancy indoor/outdoor	4/4	4/0	4/2	3/2	3/2	2/2
Weight	3989 kg	3346 kg	3872 kg	5316 kg	4779 kg	3742 kg
Power	Eight acid batteries				Acid batteries	batteries acidic4,5 kW
	6V 225Ah 48V DC	225Ah	6V 225Ah 48V DC	6V 315Ah 48V DC		
Drive	Hydraulic					electric
Wheels	Terrain filled with foam					





Model	GS2668 RT ST	GS2669 RT ST	GS3268 RT ST	GS3369 RT ST	GS4069 RT ST	GS3390 RT ST	GS4390 RT ST	GS5390 RT ST
Working height	9,92 m	9,79 m	11,75 m	11,75 m	14,12 m	11,94 m	14,75 m	17,95 m
Platform height	7,92 m	7,70 m	9,75 m	9,75 m	12,12 m	9,94 m	12,75 m	15,95 m
Slide-out platform extension dec	1,10 m	1,52 m	1,10 m	1,52 m	1,52 m	przód 1,52 m tył 1,22 m	przód 1,52 m tył 1,22 m	przód 1,52 m tył 1,22 m
Machine length/width/ heigh	2,67 m 1,73 m 2,32 m	3,12 m 1,75 m 2,59 m	2,67 m 1,73 m 2,57 m	3,12 m 1,75 m 2,59 m	3,12 m 1,75 m 2,74 m	3,94 m 2,29 m 2,71m	3,94 m 2,29 m 2,93m	3,98 m 2,29 m 3,15 m
Machine heigh with folding rails	1,7 m	1,92 m	1,83 m	1,92 m	2,08 m	2,03 m	2,25 m	2,47 m
Lift capacity	567 kg	680 kg	454 kg	454 kg	363 kg	1134 kg	680 kg	680 kg
Maximum platform occupancy	4/4	4/4	4/2	4/2	3/2	7	7	4
Weight	3236 kg	3771 kg	3701 kg	3882 kg	5073 kg	6193 kg	6628 kg	7515 kg
Power	diesel							
Drive	Hydraulic							
Wheels	Full non-marking							





Model	GS2669 BE	GS3369 BE	GS4069 BE
Working height	9,7 m	11,75 m	14,12 m
Platform height	7,7 m	9,75 m	12,12 m
Slide-out platform extension dec	1,52 m	1,52 m	1,52 m
Machine length/width/ heigh	3,12 m 1,75 m 2,59 m	3,12 m 1,75 m 2,59 m	3,12 m 1,75 m 2,74 m
Machine heigh with folding rails	1,47 m	1,47 m	1,65 m
Lift capacity	680 kg	454 kg	363 kg
Maximum platform occupancy	4/4	4/2	3/2
Weight	3859 kg	3741 kg	4893 kg
Power	48V DC 8 batteries 6V 225Ah diesel engine		48V DC 8 betteries 6V 260Ah diesel engine
Drive	Two-wheel drive		
Wheels	terrain filled with foam		





Model	PIAF 13RE	PIAF 1010
Working height	12,65 m	10,05 m
Platform height	10,65 m	8,05 m
Horizontal reach maximum	6,05 m	3,35 m
Ground clearance under the horizontal reach	7,3 m	6,65 m
Machine length/width/height	3,72 m 1,2 m 1,98 m	2,74 m 1,2 m 2,12 m
Transport height	1,98 m	2,12 m
Lift capacity	200 kg	200 kg
Maximum platform occupancy indoor/outdoor	2/1	2/1
Weight	5140 kg	2780 kg
Power	48V 260 Ah	24V 575 Ah
Drive	Electric	Hydraulic
Wheels	Full, grey Non-marking tyres	Gray, non-marking, rubber tracks

Model	Toucan 12E PLUS	E600 JP NM
Working height	12,65 m	20,39 m
Platform height	10,65 m	18,39 m
Horizontal reach maximum	6,05 m	13,54 m
Ground clearance under the horizontal reach	7,12 m	3 m
Machine length/width/height	3,65 m 1,2 m 1,99 m	10,15 m 2,42 m 2,54 m
Transport height	1,99 m	2,54 m
Lift capacity	200 kg	230 kg
Maximum platform occupancy indoor/outdoor	2/2	2/2
Weight	4900 kg	7150 kg
Power	acid batteries 260Ah	8 acid batteries 48V DC 6V 420Ah
Drive	Electric	
Wheels	Full, grey Non-marking tyres	Grey, terrain filled with foam



**MANITOU**

E-Drive

MANITOU

Articulated Boom Lift

E-Drive



Model	Manitou 80 VJR	Manitou 100 VJR	Manitou 120 AETJ C 3D	Manitou 150 AETJ C 3D/RTNM	Manitou 170 AETJ L/RTNM	Manitou 200 ATJ-E
Working height	7,65 m	9,85 m	11,95 m	14,96 m/15,02 m	16,91 m/16,95 m	20 m
Platform height	5,65 m	7,85 m	9,95 m	12,96 m/13,02 m	14,91 m/14,95 m	18 m
Horizontal reach maximum	3,24 m	3,15 m	7 m	7,11 m	9,43 m	11,57 m
Ground clearance under the horizontal reach	4,24 m	6,67 m	6,4 m	7,17m/7,2 m	7,16 m/7,2 m	7,9 m
Machine length/width/ heigh	2,95 m 0,99 m 1,99 m	2,80 m 0,99 m 1,99 m	5,48 m 1,20 m 1,99 m	6,05m/1,5m/1,97 m 6,09m/1,65m/2,01 m	6,84m/1,75m/1,97 m 6,88m/1,91m/2,01 m	8,34 m 2,32 m 2,46 m
Wysokość transportowa	1,99 m	1,99 m	2,16 m	2,08 m/2,12 m	2,04 m/2,08 m	2,71 m
Lift capacity	200 kg	200 kg	200 kg	200 kg	200 kg	230 kg
Maximum platform occupancy indoor/outdoor	2/1	2/1	2/2	2/1	2/1	2/2
Weight	2250 kg	2650 kg	6660 kg	6700 kg/6890 kg	6910 kg/7105 kg	7100 kg
Power	Acid batteries 2x 1,5kW		Acid batteries 2x4,5kW 48V 240Ah			48V 460Ah
Drive	E-drive					
Wheels	Full, grey Non-marking tyres			Full, grey Non-marking tyres/ terrain filled with foam		Full, Non-marking tyres CAMSO





Model	GR20J	GR26J	Z30/20N RJ	Z33/18	Z34/22 DC	Z34/22N	Z40/23N RJ	Z45/25 JDC NM	Z60/37 DC 4X4 NM
Working height	7,7 m	9,85 m	10,89 m	12 m	12,52 m	12,52 m	14,32 m	15,94 m	20,16 m
Platform height	5,7 m	7,85 m	8,89 m	10 m	10,52 m	10,52 m	12,32 m	13,94 m	18,16 m
Horizontal reach maximum	2,75 m	2,65 m	6,25 m	5,57 m	6,78 m	6,78 m	6,91 m	7,65 m	11,15 m
Ground clearance under the horizontal reach	4,25 m	6,70 m	3,86 m	4,28 m	4,57 m	4,65 m	6,48 m	7,24 m	7,39 m
Machine length/width/ heigh	2,95 m	2,82 m	5,31 m	4,17 m	5,64 m	5,72 m	6,53 m	6,83 m	8,15 m
	0,99 m	0,99 m	1,19 m	1,50 m	1,73 m	1,47 m	1,5 m	1,79 m	2,49 m
	1,99 m	1,99 m	2,05m	1,98 m	2 m	2 m	1,98 m	2 m	2,54 m
Transport height	1,99 m	1,99 m	2,05 m	1,98 m	2 m	2 m	1,98 m	2 m	2,62 m
Lift capacity	200 kg	200 kg	227 kg	200 kg	227 kg	227 kg	227 kg	227 kg	227 kg
Maximum platform occupancy indoor/outdoor	2/1	2/1	2/2	2/2	2/2	2/2	2/2	2/2	2/2
Weight	2250 kg	2650 kg	6450 kg	3665 kg	5179 kg	5171 kg	6940 kg	7394 kg	7530 kg
Power	Acid batteries24V DC 12x2V 250Ah		8 acid batteries 48V DC 6V 350Ah	8 acid batteries 48V DC 6V 315Ah			8 acid batteries 48V DC 6V 350Ah		8 acid batteries 48V DC 6V 390Ah
Drive	E-drive								4 hermetic electro motors
Wheels	Full, grey Non-marking tyres			Full, grey, flexible	Full, grey Non-marking tyres, filled with foam				Full, grey, filled with foam





MANITOU

Diesel 4x4

MANITOU

Articulated Boom Lifts

Diesel 4x4



Model	MAN'GO 12	160 ATJ	160 ATJ +	180 ATJ RC	200 ATJ RC	260 TJ RC	280 TJ RC
Working height	11,91 m	16,02 m	16,25 m	18,19 m	20,35 m	25,92 m	27,75 m
Platform height	9,91 m	14,02 m	14,25 m	16,19 m	18,35 m	23,91 m	25,75 m
Horizontal reach maximum	6,69 m	8,3 m	7 m	10,51 m	12 m	19,70 m	19,45m / 21,45m*
Ground clearance under the horizontal reach	4,8 m	7,38 m	8,95 m	7,55 m	8 m	-	-
Machine length/width/ heigh	5,5 m 1,8 m 2,02 m	6,68 m 2,32 m 2,37 m	6,93 m 2,30 m 2,37 m	7,79 m 2,32 m 2,47 m	8,43 m 2,47 m 2,7 m	10,8 m 2,43 m 2,75 m	11,36 m 2,48 m 2,73 m
Transport height	2,49 m	2,63 m	2,70 m	2,56 m	2,99 m	2,75 m	2,71 m
Lift capacity	230 kg	230 kg	400 kg	230 kg	230 kg	400 kg	240/350 kg*
Maximum platform occupancy indoor/outdoor	2/2	2/2	2/2	2/2	2/2	3/2	3/2
Weight	4150 kg	6118 kg	8100 kg	7430 kg	10050 kg	16300 kg	16500 kg
Power	Diesel 26 KM	Diesel 24,5 KM	Diesel 45 KM	Diesel 25 KM	Diesel 34 KM	Diesel 45 KM	Diesel 46 KM
Drive	4 hydrostatic hydromotors	mechanical on 4 wheels					
Wheels	black / gray non-marking	black field flexible openings / field filled with foam	terrain filled with foam				

*lifting capacity 240kg/350kg * limited lifting capacity





Model	Z34/22 IC 4WD	Z45/25 RT	Z45/25 J RT	Z45XC	Z51/30 JRT	Z60/34 JRT	Z62/40 JRT	Z80/60 JRT	Z135/70 JRT	ZX135/70 JRT
Working height	12,54 m	15,97 m	15,86 m	15,86 m	17,59 m	20,3 m	20,87 m	25,77 m	43,15 m	43,15 m
Platform height	10,54 m	13,97 m	13,86 m	13,86 m	15,59 m	18,3 m	18,87 m	23,77 m	41,15 m	41,15 m
Horizontal reach maximum*	6,78 m	7,49 m	7,52 m	7,55 m	9,37 m	11,05 m	12,42 m	18,29 m	21,26 m	21,26 m
Ground clearance under the horizontal reach	4,6 m	7,14 m	7,14 m	7,44 m	7,39 m	8,23 m	7,8 m	8,83 m	23,01 m	23,01 m
Machine length/width/ heigh	5,66 m	5,38 m	6,65 m	6,66 m	7,58 m	8,2 m	9,25 m	11,27 m	12,93 m	12,93 m
	1,85 m	2,29 m	2,29 m	2,29 m	2,29 m	2,5 m	2,49 m	2,49 m	3,94 m	3,94 m
	2,06 m	2,13m	2,13 m	2,25 m	2,13 m	2,7 m	2,4 m	3 m	3,07 m	3,09 m
Transport height	2,29 m	2,13 m	2,13 m	2,25 m	2,13 m	2,7 m	2,9 m	3 m	3,07 m	3,09 m
Lift capacity*	227 kg	227 kg	227 kg	454 kg	227 kg	227 kg	227 kg	227 kg	272 kg	272 kg
Maximum platform occupancy	2	2	2	3	2	2	2	2	2	2
Weight	4929 kg	6415 kg	6460 kg	7421 kg	7394 kg	10215 kg	10281 kg	16284 kg	20366 kg	21092 kg
Power	Diesel 26KM	Diesel 48 KM		Diesel 49 KM	Diesel 48 KM	Diesel	Diesel 72 KM	Diesel 74 KM		
Drive	Hydraulic									
Wheels	Terrain filled with foam									

* outreach depends on the lifting capacity
* capacity divided depending on the reach





MANITOU

BI-Energy/hybrid

Model	150 AETJ Bi-Energy	170 AETJ Bi-Energy
Working height	15,4 m	17,03 m
Platform height	13,4 m	15,03 m
Horizontal reach maximum	7,81 m	9,43 m
Ground clearance under the horizontal reach	7,27 m	7,27 m
Machine length/width/ heigh	6,11 m 1,91 m 2,10 m	6,99 m 1,91 m 2,1 m
Transport height	2,13 m	2,13 m
Lift capacity	230 kg	230 kg
Maximum platform occupancy indoor/outdoor	2/2	2/2
Weight	6435 kg	7435 kg
Power	2 acid batteries 4,5 kW/Diesel 12 KM	
Drive	two-wheels drive	
Wheels	terrain, non-marking	

Genie

Articulated Boom Lifts

BI-Energy/hybrid

Model	Z34/22 Bi-Energy	Z45/25 J Bi-Energy	Z45 FE 4x4 NM	Z60/37 FE 4x4 NM
Working height	12,52 m	15,94 m	15,92 m	20,16 m
Platform height	10,52 m	13,94 m	13,92 m	18,16 m
Horizontal reach maximum	6,78 m	7,65 m	6,94 m	11,15 m
Ground clearance under the horizontal reach	4,57 m	7,24 m	7,5 m	7,39 m
Machine length/width/ heigh	5,64 m 1,73 m 2 m	6,83 m 1,79 m 2 m	5,87 m 2,29 m 2,29 m	8,15 m 2,49 m 2,54 m
Transport height	2,26 m	2 m	2,29 m	2,64 m
Lift capacity	227 kg	227 kg	300 kg	227 kg
Maximum platform occupancy indoor/outdoor	2/2	2/2	2/2	2/2
Weight	5632 kg	7394 kg	6559 kg	7765 kg
Power	8 acid batteries			
	48V DC 6V 315Ah/ Diesel 13,3 KM	48V DC 6V 350Ah/ Diesel 13,3 KM	48V 6V 370Ah/ Diesel 24,8 KM	48V DC 6V 415Ah/ Diesel 24,8KM
Drive	two-wheels drive		four-wheels drive	
Wheels	Full, Non-marking tyres			





Genie On the trailer

Model	Genie TZ50
Working height	17,09m
Platform height	15,09 m
Horizontal reach maximum	8,89 m
Machine length/width/ heigh	7,16 m/1,68 m/2m
Transport height	2 m
Lift capacity	200 kg
Maximum platform occupancy indoor/outdoor	2/2
Weight	2025 kg
Power	4 acid batteries 6V 225Ah 24V DC
Drive	hydraulic
Wheels	Pumped

ISOLI Telescopic Boom Lifts On the car

Model	Isoli PT140
Working height	14 m
Platform height	12 m
Horizontal reach maximum	8,7 m
Machine length/width/ heigh	6,68 m/-/-
Transport height	-
Lift capacity	250 kg
Maximum platform occupancy indoor/outdoor	2/2
Weight	3500 kg
Power	hydraulic pump
Drive	Fiat Ducato, diesel engine
Wheels	Pumped





MANITOU

Diesel on the wheels 4x4

MANITOU

Telescopic boom lifts

Diesel on the wheels 4x4



Model	220 TJ	220 TJ +	260 TJ	280 TJ
Working height	21,77 m	21,74 m	25,91 m	27,75 m
Platform height	19,77 m	19,74 m	23,91 m	25,75 m
Horizontal reach maximum*	17,63 m	17,79 m	19,70 m	19,45 m / 21,45 m
Ground clearance under the horizontal reach	2,55 m	2,51 m	-	-
Machine length/width/ heigh	9,8 m 2,48 m 2,66 m	10,06 m 2,48 m 2,66 m	10,8 m 2,43 m 2,75 m	11,36 m 2,48 m 2,73 m
Machine heigh with folding rails	2,72 m	3,03 m	2,75 m	2,71 m
Lift capacity*	230 kg	400 kg	400 kg	240kg/350kg
Maximum platform occupancy indoor/outdoor	2/2	3/3	3/2	3/2
Weight	11850 kg	13600 kg	16300 kg	16500 kg
Power	Diesel 37 KM		Diesel 45 KM	Diesel 46 KM
Drive	mechanical on 4 wheels			
Wheels	terrain, black, filled with foam			

* outreach depends on the lifting capacity
* capacity divided depending on the reach





Model	S45	S45XC
Working height	15,72 m	15,39 m
Platform height	13,72 m	13,39 m
Horizontal reach maximum*	11,18 m	11,02 m
Machine length/width/ heigh	8,48 m 2,24 m 2,49 m	8 m 2,49 m 2,51 m
Transport height	2,49 m	2,51 m
Lift capacity*	227 kg	454 kg
Maximum platform occupancy indo- or/outdoor	2/2	3-Horizon- tal reach/2
Weight	6709 kg	7394 kg
Power	Diesel 48 km	Diesel 49 km
Drive	Hydraulic	
Wheels	filled with foam	

* outreach depends on the lifting capacity
* capacity divided depending on the reach

S60 J	S65	S65 XC	S85	S85XC	S105	SX105 XC	S125	SX125 XC	SX135 XC	SX150	SX180
20,5 m	21,8 m	21,81 m	27,9 m	27,91 m	34 m	34 m	40,15 m	40,10 m	43,15 m	48,33 m	56,86 m
18,5 m	19,8 m	19,81 m	25,9 m	25,91 m	32 m	32 m	38,15 m	38,10 m	41,15 m	46,33 m	54,86 m
12,3 m	17,1 m	16,51 m	23,32 m	22,71 m	24,38 m	24,38 m	24,38 m	24,38 m	27,43 m	24,38 m	24,38 m
9,7 m 2,49 m 2,69 m	9,42 m 2,49 m 2,72 m	9,76 m 2,49 m 2,81 m	12,20 m 2,5 m 2,8 m	12,37 m 2,49 m 2,8 m	14,20 m 2,48 m 3,07 m	14,25 m 2,49 m 3,05 m	14,25 m 2,49 m 3,07 m	14,25 m 2,49 m 3,05 m	19,76 m 2,49 m 3,05 m	16,18 m 2,49 m 3,05 m	14,33 m 2,49 m 3,05 m
2,69 m	2,72 m	2,81 m	2,8 m	2,8 m	3,07 m	3,05 m	3,07 m	3,05 m	3,05 m	3,05 m	3,05 m
300 kg	227 kg	454 kg	227 kg	454 kg	227 kg	454 kg	227 kg	454 kg	454 kg	340 kg	340 kg
2/2	2/2	3-Horizon- tal reach /2	2/2	3-Horizon- tal reach/2	2/2	3-Horizon- tal reach/2	2/2	3-Horizon- tal reach/2	3/2	2	2
7550 kg	10102 kg	11673 kg	17236 kg	17917 kg	18144 kg	19300 kg	20248 kg	20700 kg	21546 kg	22657 kg	24948 kg
Diesel 49 km	Diesel 48 km		Diesel 74 km								
Hydraulic											
filled with foam											





On tracks 4x4



Telescopic Boom Lifts

On tracks



Model	Genie S45XC Trax	Genie S65 XC Trax	AICHI SR 14 CJ2
Working height	15,39 m	21,81 m	15,6 m
Platform height	13,39 m	19,81 m	13,6 m
Horizontal reach maximum*	11,02m	16,51 m	12,7 m
Machine length/width/ heigh	8 m 2,31 m 2,56 m	9,76 m 2,58 m 2,81 m	7,72 m 2,45 m 1,72 m
Transport height	2,56 m	2,81 m	-
Lift capacity*	454 kg	300 kg	227 kg
Maximum platform occupancy indoor/outdoor	3-Horizontal reach limited/2	3-Horizontal reach limited/2	2/2
Weight	7956 kg	13154 kg	8510 kg
Power	Diesel 49 km	Diesel 48 hp	Diesel 45 km
Drive	hydraulic		
Eheels	rubber tracks		steel tracks

* outreach depends on the lifting capacity
* capacity divided depending on the reach






Powered by CO2 or compressed air



Material Lifts

Powered by CO2 or compressed air

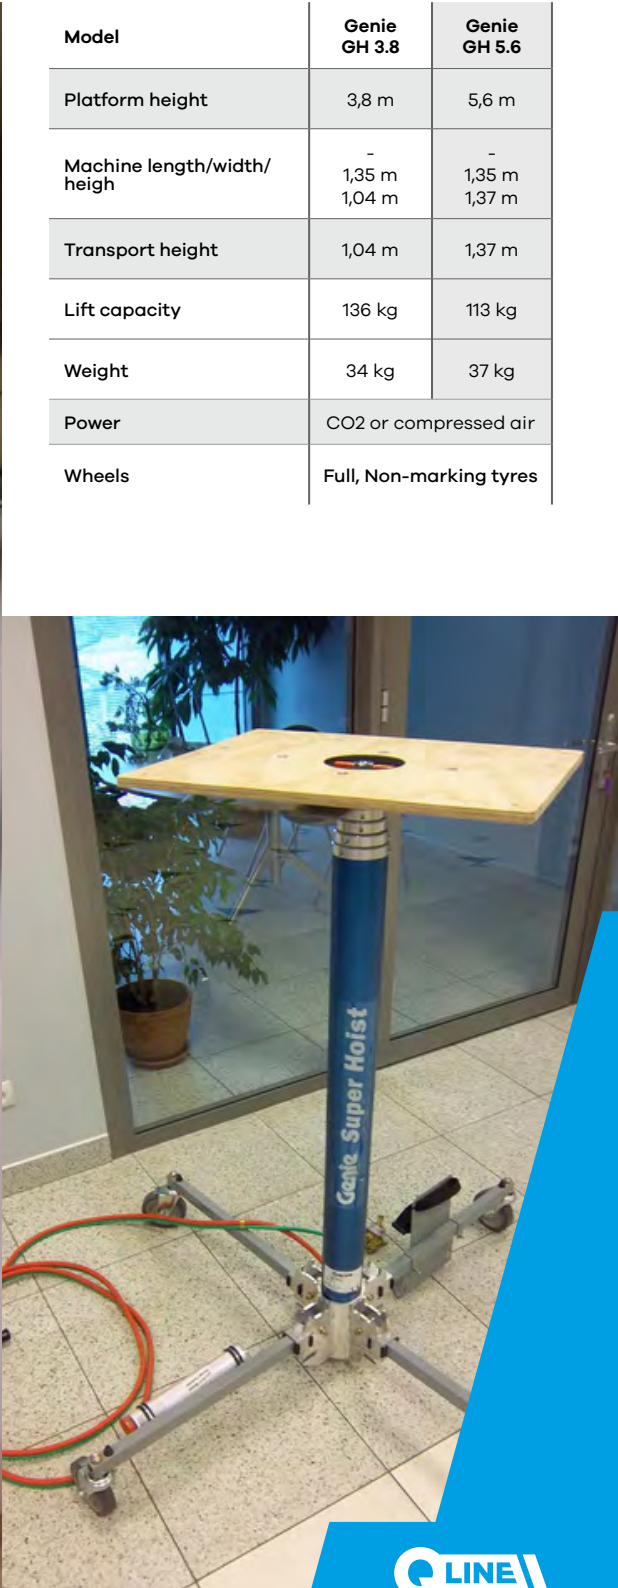

Model	Genie GH 3.8	Genie GH 5.6
Platform height	3,8 m	5,6 m
Machine length/width/ heigh	- 1,35 m 1,04 m	- 1,35 m 1,37 m
Transport height	1,04 m	1,37 m
Lift capacity	136 kg	113 kg
Weight	34 kg	37 kg
Power	CO2 or compressed air	
Wheels	Full, Non-marking tyres	





Wienold

Manual

Model	Wienold MFC/K	Wienold MFC/K RT	Wienold MFC/Ks	Wienold MFC/Ks RT	Wienold SLK10	Wienold SLK15	Wienold SLK20	Wienold SLK25	Wienold WLUP/ Ks 1.7	Wienold WLUP/ KS 2.8
Platform height	2,9 m	2,9 m	2,9 m	2,9 m	3,5 m	5 m	6,5 m	7,9 m	1,7 m	2,85 m
Machine length/width/ heigh	1,20 m 0,65 m 1 m	1,26 m 0,78 m 1 m	1,20 m 0,65 m 1 m	1,26 m 0,78 m 1 m	0,9 m 0,8 m 1,98 m	0,9 m 0,8 m 1,98 m	1,02 m 0,8 m 1,98 m	0,96 m 0,8 m 1,98 m	0,63 m 0,5 m 1,68 m	0,63 m 0,5 m 1,68 m
Transport height	1 m	1 m	1 m	1 m	1,98 m	1,98 m	1,98 m	1,98 m	1,68 m	1,68 m
Lift capacity	900 kg	900 kg	555 kg	555 kg	450 kg	360 kg	360 kg	300 kg	400 kg	400 kg
Weight	206 kg	248 kg	168 kg	210 kg	122 kg	150 kg	182 kg	200 kg	97kg	113 kg
Power	-	-	-	-	-	-	-	-	-	-
Drive	manual or drill									
Wheels	Non-marking tyres									

Genie

Material Lifts

Manual

Wienold WLUP/ Ks 4.0	Wienold WLUP/ Ks 5.1	Genie SLC12	Genie SLC18	Genie SLC24	Genie SLA5	Genie SLA10	Genie SLA15	Genie SLA20	Genie SLA25	Genie ST20	GENIE ST25
4 m	5,15 m	3,94 m	5,64 m	7,32 m	2 m	3,49 m	4,98 m	6,46 m	7,94 m	6,46 m	7,94 m
0,63 m 0,5 m 1,68 m	0,63 m 0,5 m 1,68 m	0,86 m 0,8 m 2,18 m	0,86m 0,8 m 2,18 m	0,86 m 0,8 m 2,18 m	0,74 m 0,8 m 2 m	0,74 m 0,8 m 2 m	0,74 m 0,8 m 2 m	0,74 m 0,8 m 2 m	0,79 m 0,8 m 2 m	0,64 m 0,56 m 2 m	0,64 m 0,56 m 2,2 m
1,68 m	1,68 m	2,18 m	2,18 m	2,18 m	2 m	2 m	2 m	2 m	2 m	2 m	2,2 m
400 kg	360kg	295 kg	295 kg	295 kg	454 kg	454 kg	363 kg	363 kg	295 kg	364 kg	295 kg
129 kg	145 kg	102 kg	139 kg	157kg	98 kg	118 kg	151 kg	184 kg	204 kg	230 kg	252 kg
-	-	Crank or winch									
manual or drill											
Non-marking tyres											





Self-propelled



Passenger Lifts

Sliding



Model	JLG TOUCAN DUO
Working height	6 m
Platform height	4 m
Slide-out platform extension dec	-
Machine length/width/ heigh	1,65 m 0,78 m 1,79 m
Transport height	1,79 m
Lift capacity	130 kg
Maximum platform occupancy indoor/outdoor	1/-
Weight	1000 kg
Power	batteries 24V -180Ah
Drive	two electric motors
Wheels	White non-marking




Model	JLG PECOLIFT	JLG ECOLIFT
Working height	3,5 m	4,2 m
Platform height	1,5 m	2,2 m
Slide-out platform extension dec	-	-
Machine length/width/ heigh	0,99 m 0,7 m 1,55 m	1,28 m 0,7 m 1,94 m
Transport height	-	-
Lift capacity	150 kg	150 kg
Maximum platform occupancy indoor/outdoor	1/0	1/0
Weight	180 kg	305 kg
Power	-	
Drive	manual	
Wheels	full, non-marking gray	





Model	Genie GRC 12	Genie GR 20*	Genie AWP30S DC*	Genie IWP25S DC*
Working height	5,66 m	7,85 m	11 m	9,44 m
Platform height	3,66 m	6,02 m	9 m	7,44 m
Slide-out platform extension dec	0,41 m	0,51 m	-	0,66 m
Machine length/width/ heigh	1,37 m 0,8 m 1,7 m	1,35 m 0,80 m 1,98 m	1,35 m 0,74 m 1,98 m	1,52 m 0,81 m 1,98 m
Transport height	1,7 m	1,93 m	2,01 m	1,93 m
Lift capacity	227 kg	159 kg	159 kg	159 kg
Maximum platform occupancy indoor/outdoor	2/-	1/-	1/-	1/-
Weight	948 kg	1113 kg	371 kg	630 kg
Power	24V 4 batteries 6V 225Ah	24V 4 acid batteries 6V 225Ah	12 V 110Ah	12 V 110V
Drive	hydraulic	battery drive		
Wheels	Non-marking tyres			

* the offer also includes other models of given machines, for an offer, contact a Gizo representative

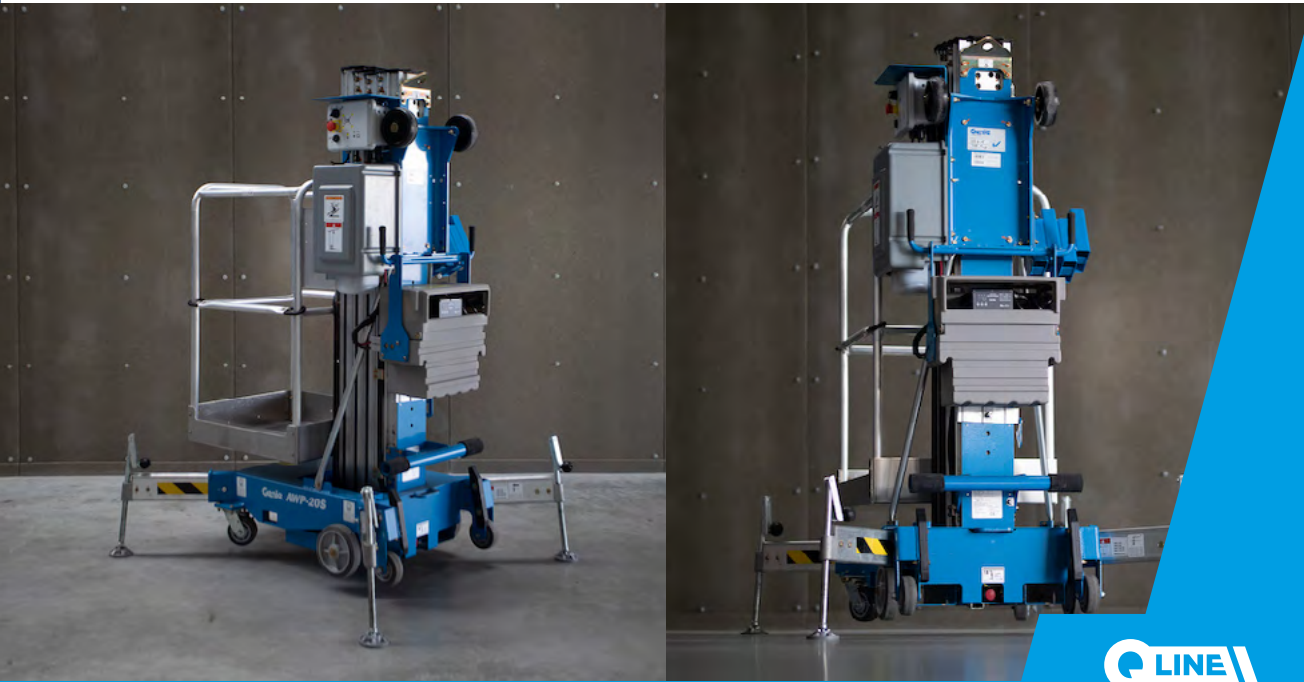



Linde E-drive

Model	Linde E20	Linde E25	Linde E30/600 H	Linde E35	Linde E40	Linde E50HL
Lift capacity	2 t	2,5 t	3 t	3,5 t	4 t	5 t
The height of raising	3,13 m	3,13 m	5,33 m	3,1 m	3,1 m	5,51 m
Weight	3968 kg	4453 kg	5643 kg	6670 kg	7157 kg	8041 kg



KALMAR E-drive

Model	Kalmar 8t
Lift capacity	8 t
The height of raising	5,7 m
Weight	12400 kg

KALMAR Diesel

Model	Kalmar 16t
Lift capacity	16 t
The height of raising	5 m
Weight	22400 kg

Linde Diesel

Model	Linde H40D	Linde H70D	Linde H80D
Lift capacity	4 t	7 t	8 t
The height of raising	3 m	3,15 m	3,15 m
Weight	5804 kg	11391 kg	12335 kg

MANITOU Diesel 4x4

Model	Manitou M25-4 BUGGY	Manitou M30-4	Manitou M50-4
Lift capacity	2500 kg	3000 kg	5000 kg
The height of raising	3,3 m	5,5 m	5,5 m
Weight	4260 kg	5485 kg	8190 kg

JCB Diesel 4x4

Model	JCB 930
Lift capacity	3 t
The height of raising	5,5 m
Weight	6340 kg



Genie Compact

Model	Genie GTH-2506	Genie GTH-3007
Maximum load	2500 kg	3000 kg
Maximum lifting height	5,79 m	6,89 m
Maximum range	3,35 m	3,99 m
Weight	4450 kg	5900 kg



MANITOU With outriggers

Model	Manitou MT 1440	Manitou MT 1840
Maximum load	4000 kg	4000 kg
Maximum lifting height	13,53 m	17,50 m
Maximum range	9,38 m	13,17 m
Weight	11115 kg	11380 kg



Genie With outriggers

Model	Genie GTH-4013	Genie GTH-4014	Genie GTH-4017	Genie GTH-4018
Maximum load	4000 kg	4000 kg	4000 kg	4000 kg
Maximum lifting height	12,99 m	13,57 kg	17,19 m	17,61 m
Maximum range	9,08 m	9,08 m	13,33 m	13,36 m
Weight	10100 kg	10140 kg	11900 kg	11980 kg



MANITOU Roto

Model	Manitou MRT 1840	Manitou MRT 2150
Maximum load	4000 kg	5000 kg
Maximum lifting height	17,90 m	20,60 m
Maximum range	15,10 m	18,10 m
Weight	13300 kg	16095 kg



Two-segment boom AMIGO



Extensions



Hook



Hydraulic winch with hook



Mini loaders

Bobcat

Model	Bobcat S130	Bobcat S330
Lift capacity	589 kg	1496 kg
The height of raising	2,1 m	2,6 m
Weight	2374 kg	4166 kg



Mini diggers

Bobcat

Model	Bobcat 325	Bobcat 435
Digging depth	2,55m	3,4m
Digging force	21 200N	35105N
Weight	2907kg	4788kg



Self-propelled cranes 57

Valla
MANITEX

Model	Valla 25E*	Valla V110R*
The height of raising	4,9 m	10,4m
Machine length/width/heigh	2,73m/0,95m/1,69m	4,18m/1,5m/1,95m
Lift capacity	2,5 t	11 t
Weight	2 200 kg	11 400 kg
Power	48V 200Ah	80V 640 Ah
Drive	electro engine AC 3kW on the rear wheel	dual electro engines AC 2x12kW on the front wheel
Wheels	Non-marking tyres	grey, Non-marking tyres

* the offer also includes other models of given machines, in order to obtain an offer, contact a Gizo representative



Forks



Demolition hammer



Snow plow



Salt and sand spreader



Pallet forks



Transplanting machine



Transport bucket



Digging bucket



Ozonator



Supply voltage: 230V
Power: 230W
Ozone efficiency: 30g/h

Diggers



Weight 24t
2 buckets
Tracks width 60cm

Containers



Lengths 6m, storage with double closure, offices with windows

Tractors



Drive 4x4
Power 120km
Attachment

Transport rollers Udźwig do 50 ton



Lifting capacity up to 50 ton
Easy load maneuvering
Compact dimensions for transport

Aluminum ramps




Length 2-5m,
Width 30-72cm,
Weight szt. 15-50kg
Load capacity 2-30 tonne

Fuel tanks



Single-walled 900l,
Double-walled 5000l,
Equipment: distributor, counter, electric pump, lockable lid, the possibility of forklift transport, telescopic loader, cranes.

Trailers

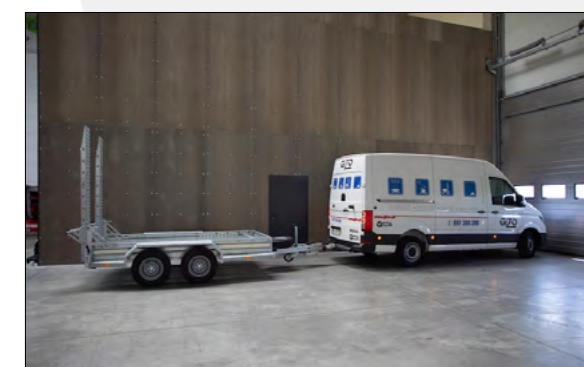

The length of the loading surface 3m,
Width 1,59m
The height of the floor 0,46m
Weight 839 kg
Permissible gross weight 3500kg

Trailers



Platform trailers 2-3 axes
Platform trailers with a capacity of 12t-16t
Length 8-12m
Possibility of attaching telescopic loaders and forklifts to tractors

Electric vehicles



Speed up to 40km/h
Left hand drive
Chassis with cab and longer wheelbase European approval for quadricycles

Pacton semi-trailers



Length 13,64m
Width 2,55m
Platform height 0,85-0,95m
Curb weight 8t
Technical payload 35 tonne

Power generators



Power 40KW 60KW
Compact dimensions
Control panel QC 1003
External fuel filler
Enlarged fuel tank
Skids
Switch strip
Electronic speed controller

Transport



Modern transport fleet: MAN Mercedes trucks, load capacity 6-10 t,
Volvo Man trucks, load capacity 16 tons,
Set of a tractor unit and a low-bed semi-trailer 28-tonne
Tractor unit and trailer with tarpaulin.

Battery regenerator



	Regenerator
Power supply	220V-240V/16A/50-60Hz
Voltage range	6-48V
Charging current	0-50A
Discharge current	0-160A
Height/width/length	0,76m/0,44m/0,31m
Permissible operating temperature	-20 ° C/+40 ° C
Weight	35kg

Our company branches:

Warsaw Central

ul. Sadowa 21
05-850 Jawczyce
(węzeł Konotopa)
+48 22 609 62 25
warszawa@gizo.pl

Bełchatów

Strefa Przemysłowa Bogumiłów
ul. Karolowa 9
97-410 Kleszczów
+48 44 731 46 56
belchatow@gizo.pl

Białystok

Złotoria 225
16-070 Choroszcz
Trasa nr 8 Warszawa – Białystok
+48 85 719 34 30
bialystok@gizo.pl

Gdańsk

ul. Gdańska 2
83-021 Bystra
+48 58 341 86 98
gdansk@gizo.pl

Lublin

ul. Metalurgiczna 15
20-234 Lublin
+48 694 145 595
lublin@gizo.pl

Poznań

ul. Poznańska 48, Swadzim
62-080 Tarnowo Podgórne
+48 61 843 38 44
poznan@gizo.pl

Szczecin

ul. Wichrowa 1a
72-006 Mierzyn
+48 607 334 200
szczecin@gizo.pl

Tychy

ul. Beskidzka 21
43-100 Tychy
trasa nr 1 Katowice – Tychy
+48 32 329 86 25
tychy@gizo.pl

Wrocław

ul. Zachodnia 2
55-011 Siechnice
+48 71 396 37 96
wroclaw@gizo.pl

Foreign branches:

Bremen Niemcy

+49 47 11 42 93 40
europa@gizo.pl

Nitra Słowacja

Dolné Hony 472/31
949 04 Nitra
+421 902 377 270
slovensko@gizo.pl

Žatec Czechy

V areálu Bussines Park Most -
Čepirohy
Čepirohy 54, 434 01 Most -
Čepirohy
+420 608 884 138
cz@gizo.pl

Mogilev Białoruś

+375 293 211 999
sasha@gizo.pl